



(VRLA)

(AGM)

10

99%.

99.7%.

100%

	6	
	12	
	6	
	700	
	4182	
	3.30	25°C
	37.1	
	1.300	
25°	109.6	(20)
1.75	96.0	(8)
	+20°	+25°
	: -40°	+60°
	: -40°	+50°
	13.5	13.8 25°
	C/4	100%
	1.5%	
	6	25°

TC-12120S

UL 1778;
28%.

DOT - CFR

49,




171-189.

IMDG
IATA/ ICAO,

27.

A67.

25°										
	5	10	15	20	30	40	45	50	60	90
1.60	3933	2918	2251	1842	1365	1095	1009	923	803	585
1.67	3800	2863	2227	1825	1355	1088	1003	918	799	584
1.70	3742	2842	2212	1815	1350	1085	1000	916	798	580
1.75	3548	2675	2132	1780	1337	1075	991	908	791	579

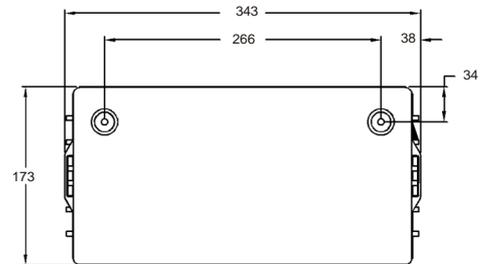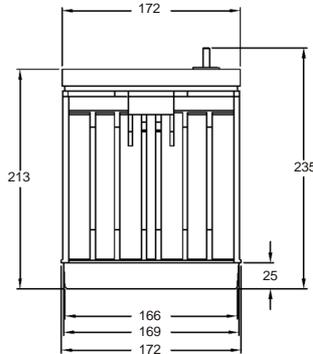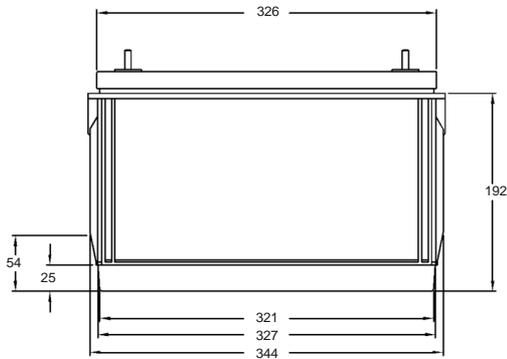

POWER BATTERY

UL CUL.



PRC/TC-12120S					
Model	Cells	Dimensions (mm)			
		Length	Width	Height	Weight
KS5	2	381	635	400	95.9
KS6	4	406	876	451	184.5
KS7	8	406	876	946	369.1
CR1	12	610	826	1092	570
CR3	20	1016	826	1092	900.9
CR6	30	1016	826	1524	1330
CR4	40	1016	826	1956	1759

Voltage	25°									
	1	2	3	4	5	6	8	10	12	24
1.75	66.7	38.8	28.2	22.1	18.2	15.5	12.0	9.80	8.37	4.51
1.80	65.7	38.4	27.9	21.7	17.9	15.3	11.9	9.75	8.29	4.46
1.85	63.1	37.3	26.9	21.0	17.3	14.8	11.5	9.42	8.01	4.30
1.90	58.0	34.8	25.3	19.8	16.3	13.9	10.7	8.70	7.33	3.97