



(VRLA)

(AGM)

10

99%.
99.7%.
100%

	6
	12
	6
	805
	5454
	2.2 25°C
	48.1
	1.300
25° ,	136 (20)
1.75 -	128 (8)
	+20° +25°
	: -40° +60°
	: -40° +50°
	13.5 13.8 25°
	C/4 100%
	1.5%
	6 25°

TC-12150C

UL 1778;
28%.

DOT - CFR

49,

171-189.


IMDG

27.

IATA/ ICAO,

A67.

	25°									
	5	10	15	20	30	40	45	50	60	90
1.60	5673	3975	3065	2543	1843	1490	1359	1267	1108	715
1.67	5480	3900	3030	2520	1830	1480	1350	1260	1102	712
1.70	5396	3871	3011	2505	1823	1476	1346	1257	1101	707
1.75	5117	3643	2902	2458	1807	1462	1334	1245	1092	706

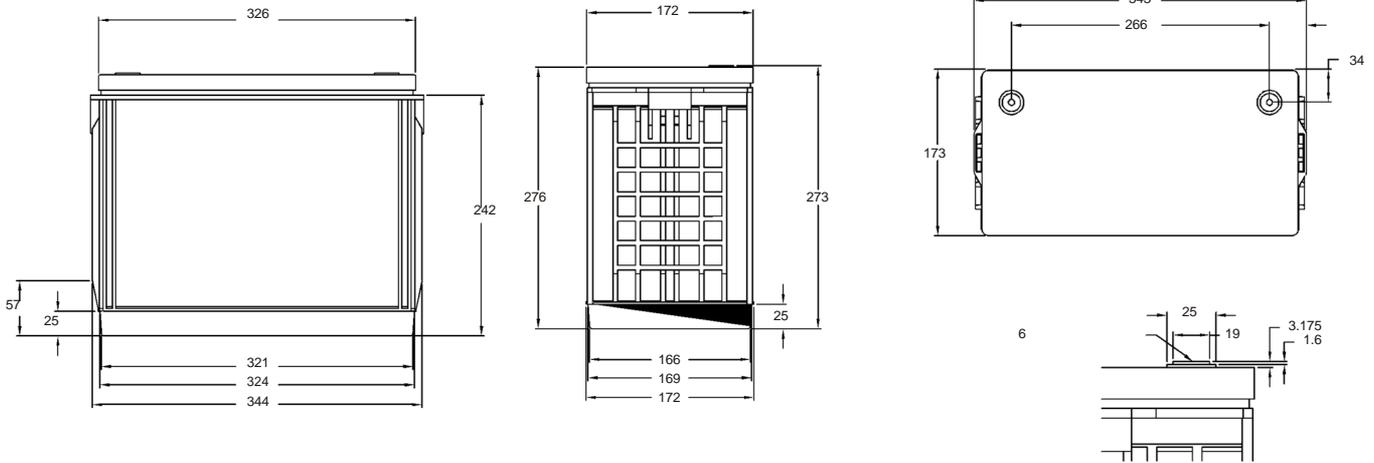

POWER BATTERY

UL CUL.

PRC/TC-12150C					
KS5	2	381	635	400	112
KS6	4	406	876	451	217
KS7	8	406	876	946	433
CR1	12	610	826	1092	666
CR3	20	1016	826	1092	1061
CR6	30	1016	826	1524	1570
CR4	40	1016	826	1956	2079

25°										
	1	2	3	4	5	6	8	10	12	24
1.75	95.0	47.2	34.4	27.0	23.5	18.9	16.0	14.0	10.2	5.50
1.80	80.1	46.9	34.0	26.5	21.9	18.6	14.5	11.9	10.1	5.40
1.85	76.9	45.4	32.8	25.6	21.1	18.1	14.0	11.5	9.70	5.20
1.90	70.7	42.5	30.8	24.2	19.9	17.0	13.0	10.6	8.90	4.80